


Especificaciones

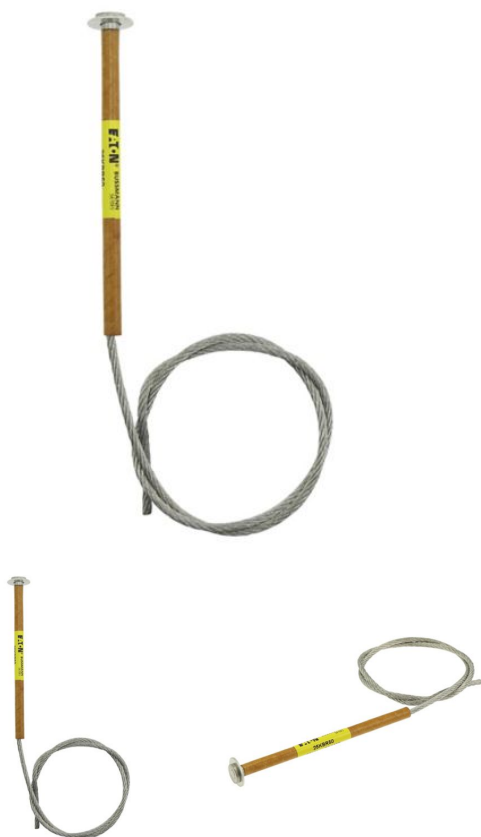

Eaton 25KBR50

Expulsion link, medium voltage, 50 A, AC 25 kV, ANSI, K fast

General specifications

PRODUCT NAME	Eaton Bussmann series medium voltage expulsion fuse
CATALOG NUMBER	25KBR50
UPC	051712296434
EAN	5027590470582
PRODUCT LENGTH/DEPTH	660 mm
PRODUCT HEIGHT	19 mm
PRODUCT WIDTH	19 mm
PRODUCT WEIGHT	46.24 g
COMPLIANCES	ANSI C37.42



Powering Business Worldwide

Especificaciones del producto

AMPERAGE RATING	50 A
CURRENT CHARACTERISTIC TYPE	Type K - Complies with ANSI C 37-42 requirements for fast acting K Characteristics
RATED FREQUENCY - MAX	60 Hz
RATED FREQUENCY - MIN	50 Hz
RELEASE CHARACTERISTIC	K
STANDARD	ANSI
TYPE OF TERMINATION	Removable buttonhead
VOLTAGE TYPE	AC
COLOR	Yellow
INTERRUPT RATING	8 kAIC
CONSTRUCTION SIZE	660 mm
VOLTAGE RATING	25 kV
TYPE	Medium Voltage Expulsion Fuse Link
APPLICATION	Primary side transformer protection, feeder protection, capacitor bank protection

Recursos

PROJECT NAME:

PROJECT NUMBER:

PREPARED BY:

FECHA:



Eaton Corporation plc

Eaton House
Carretera 30 Pembroke
Dublín 4, Irlanda
Eaton.com

Follow us on social media to get the latest product and support information.



© 2025 Eaton. Todos los derechos reservados.