

AW LED LED AREA WARNING LIGHTS



CAT.#		APPROVALS
JOB	TYPE	

SPECIFICATIONS

Applications -

- For use as obstruction indication for buildings and towers.

Specifications -

- Uses 95% less energy than incandescent, only 6.5 total watts per unit
- Available as a single or dual unit
- Available in 120 - 240VAC
- Lasts years longer than an incandescent
- Weather/corrosion resistant lamp assembly and housing
- Red polycarbonate lens
- Self-contained wiring compartment eliminates additional boxes
- Threaded 1" side and bottom hubs for single unit
- Threaded 1" bottom hub for dual unit
- Both units supplied with adapter for 3/4" mount
- Resistant to shock and vibration
- IP66 / NEMA 4X

Listings -

- UL listed

Certifications/Compliance -

- FAA AC NO: 150/5345-43G (Red Obstruction Lighting)



ORDERING INFORMATION


ORDERING EXAMPLE: AWSP3120



SERIES

AWSP3120	Single AW LED area warning light
AWDP3120	Twin AW LED area warning light

DIMENSIONS

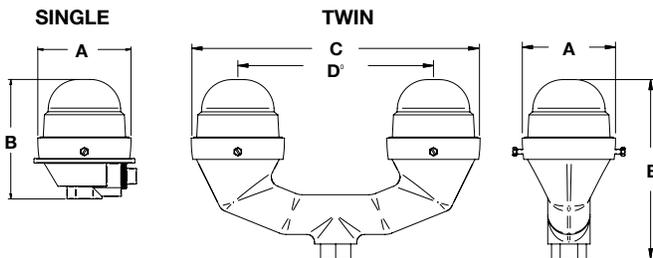

	A	B	C	D
TWIN	4.62"	8.90"	14.40"	9.80"
	117.35mm	226.06mm	365.76mm	248.92mm
SINGLE	4.62"	5.93"	N/A	N/A
	117.35mm	150.62mm	N/A	N/A