

INTERRUPTORES BTPLUG

Catálogo



INTERRUPTORES TERMOMAGNÉTICOS BTPLUG ENCHUFABLES

VERSIÓN	TENSIÓN NOMINAL (V~)	CAPACIDAD INTERRUPTIVA Icu (kA)	CORRIENTE NOMINAL In (A)	INTERRUPTOR	CALIBRE DEL CONDUCTOR MÁXIMO ADMISIBLE
1 polo	120/240	10	10	BTN1/10	1CxF 12 - 6 AWG Cu
			15	BTN1/15	
			20	BTN1/20	
			30	BTN1/30	
			40	BTN1/40	1CxF 10 - 1/0 AWG Cu
			50	BTN1/50	
			60	BTN1/60	



2 polos	120/240	10	10	BTN2/10	1CxF 12 - 6 AWG Cu
			15	BTN2/15	
			20	BTN2/20	
			30	BTN2/30	
			40	BTN2/40	1CxF 10 - 1/0 AWG Cu
			50	BTN2/50	
			60	BTN2/60	




3 Polos	120/240	10	10	BTN3/10	1CxF 12 - 6 AWG Cu
			15	BTN3/15	
			20	BTN3/20	
			30	BTN3/30	
			40	BTN3/40	1CxF 10 - 1/0 AWG Cu
			50	BTN3/50	
			60	BTN3/60	


BTN3/70

CURVAS DE INTERVENCIÓN

BTPLUG BTN/... CARACTERÍSTICAS DE OPERACIÓN TERMOMAGNÉTICA

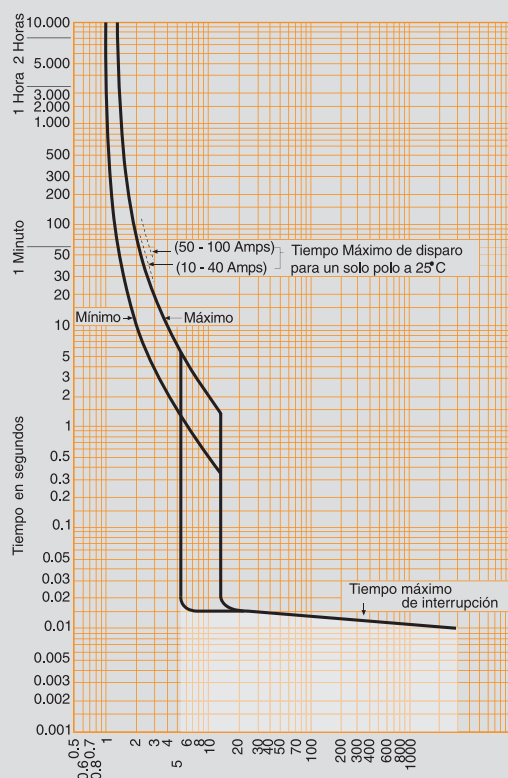

DATOS DIMENSIONALES

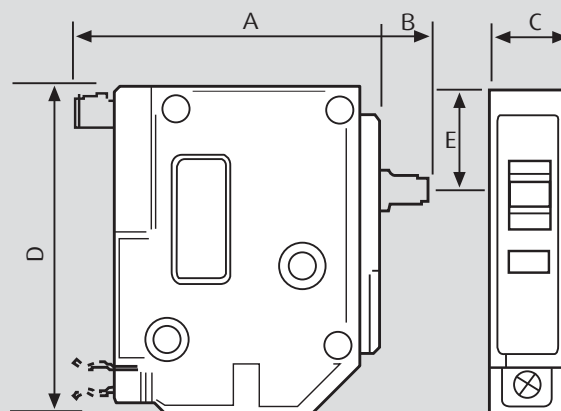

Dimensiones en milímetros

	1 POLO	2 POLOS	3 POLOS
	BTN1/...	BTN2/...	BTN3/...
A	72.9	72.9	72.9
B	12.3	13.1	13.1
C	18.85	37.7	56.55
D	77.8	77.8	77.8
E	24.4	24.4	24.4